



BLUEGRASS STATION

TIEBACK • PRESSURE GROUTING • UNDERPINNING

PROJECT DESCRIPTION:

Project Date: March 5, 2005

Project Name: Bluegrass Station


Project Location: Lexington, Kentucky

Engineer of Record: Marcum Engineering

General Contractor: Baesler Construction

Magnum Installer: Dwyer Companies

Project Description: An exterior wall was severely bowed, the existing footings had settled, and the foundation was rotating and leaning outward. Dwyer installed 29 Helical Tiebacks, 8 Push Piers, Pressure Grouted 8' below the footings to fill voids, and then Slabjacked the interior floor slab 2".

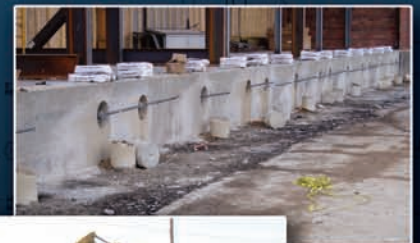

Toll Free: 800.822.7437 www.magnumpiering.com