



# Magnum Case History

**Project Name:** Stonepark of Dunwoody Condominium


**Magnum Installer:** Extreme Technology's  
Atlanta, GA  
[www.extremetechnologys.com](http://www.extremetechnologys.com)

**Job Location:** Atlanta, GA

**Project Type:** Magnum Steel Push Pier & Magnum Helix Piers

**Project Description:**

Severe settlement had occurred on a condominium unit because of poor quality fill and poor compaction. A total of 89 Magnum Push Piers & 16 Magnum Helix Piers were installed on both the exterior & interior of the unit. Average pier depth was 45 ft. & all piers had to penetrate trash & debris used as fill. This extremely difficult project was successfully completed in 28 weeks. (see below for additional details)

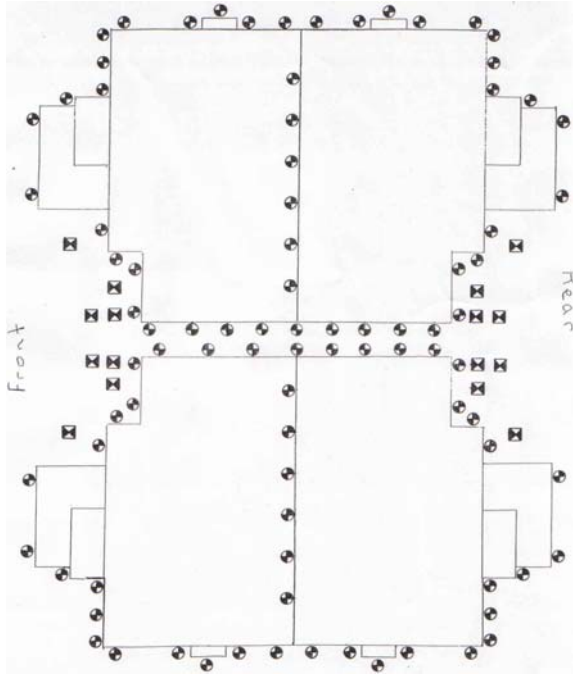



Previous to contracting with Extreme Technology's, the property managers contracted with two other foundation repair contractors, and both of their attempts to ended in failure and continued settlement. Of the 35 piers claimed by the contractors to have been successfully installed, it was later discovered that just 7 of their piers actually penetrated the trash fill material to reach suitable load bearing soils.